




# Fun Cup UK

## ! SERVICE NOTE !

we have found that the welds on the rear wishbone tabs have cracked  
please check these welds

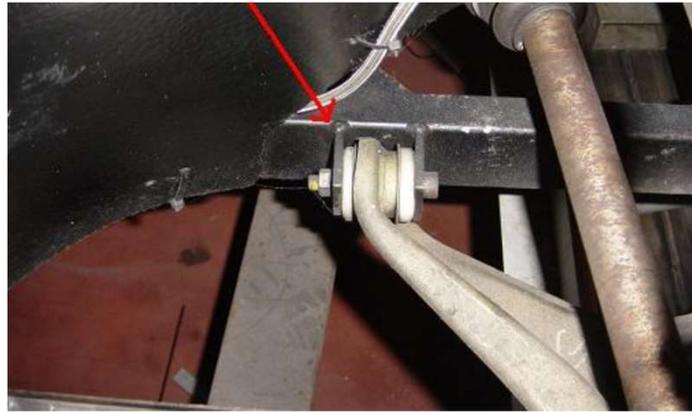

If cracks are found it is advised that you replace them with reinforced ones  
CH43G (left) and CH43D (right)

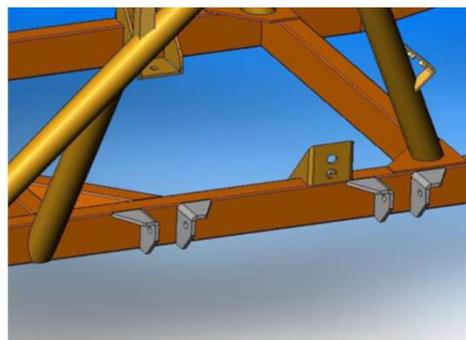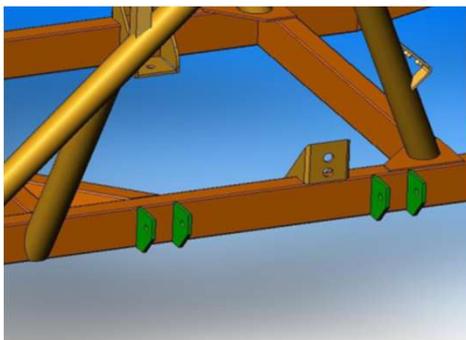

As a precaution we recommend you change these even if the weld looks good

If you change these yourself replace one by one and be sure to weld them in the correct place the  
correct spacing between the mounts is 44.3mm